KVM 72-Z44

Cable gland, brass, DIN 89280, M72



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

RoHS

Material cable gland	Brass
Material sealing gasket	EPDM
Material earthing insert	Brass chromium-plated
Temp. range min	-40 °C
Temp. range max	100 °C
Protection class	IP54
Thread type	M
Ø Connection thread D	72
Lead	2
Length screw-in thread L	16 mm
Ø cable diameter min	41 mm
Ø cable diameter max	44,5 mm
Key width SW	70 mm
Collar diameter (E)	75 mm
Total length TL	73 mm
Install. torques fitting	20 N m
Install. torques cap nut	15 N m
Impact category	6
Advice	* Similar to DIN 89280
Surface	Bright
Order no. bright	10010855
Type	KVM 72-Z44
Packing unit	1
Tariff number	85369010
EAN number	4007685108553

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice

ETIM-Classification	EC000441

Recommended accessories

GM 72	50011425

16.09.2026

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice

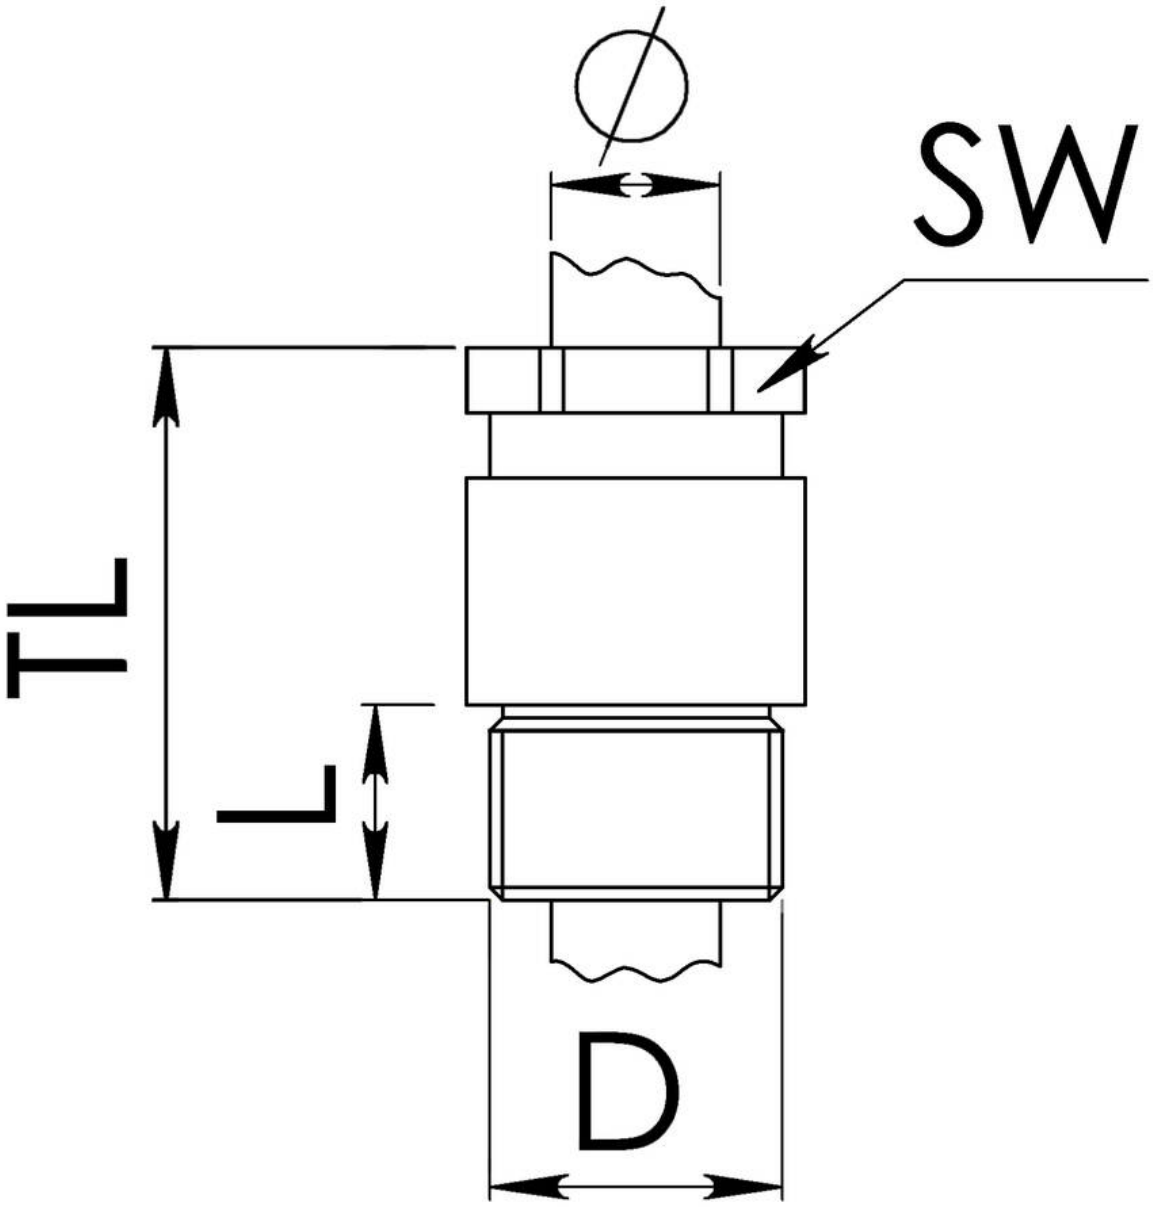

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice